

WORKIO[®]
DIGITAL COLOR IMAGING SYSTEMS

compact

▶ DP-8016P



Digital Imaging Systems

High Speed; Up to 16 ppm
Digital Printing/Copying


Standard Document Handling Software

User Authentication

Security Features

Panasonic ideas for life


DP-8016P Options

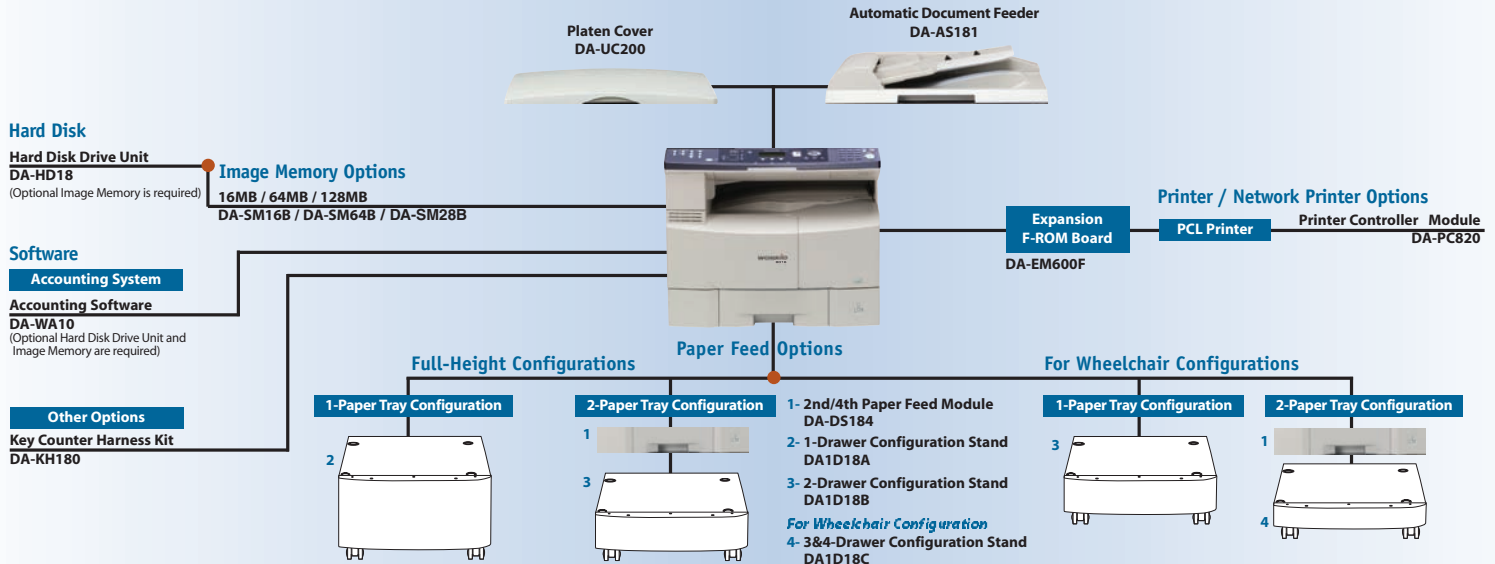

DP-8016P Specifications

General	
Type	Desktop
Copy / Print Process	Laser Indirect Electrostatic
Developing Process	Dry Dual Component
Automatic Document Feeder (Option)	50 sheets (Letter, 20 lb 75 g/m ²)
Paper Feed	Std. 550-sheet paper tray x 1 + 50-sheet bypass Max. 1,150 sheets with option
Paper Weight	Paper Tray: 16 to 24 lb (60 to 90 g/m ²) Bypass: 15 to 34 lb (55 to 133 g/m ²)
Power Requirements	AC 120, 60 Hz, 12A
Power Consumption	Max.: Less than 1.3 kW Power Save mode: Approx. 19 W Sleep mode: Approx. 8.5 W
Warm-up Time	Approx. 30 sec. (Main power switch ON) Approx. 30 sec. (Sleep mode)
Dimensions (W x D x H)*1	22.0" x 21.9" x 18.1" (558 x 557 x 460 mm)
(H=Height To Platen Glass)	(Excluding optional equipment)
Weight*1	Approx. 93.3 lb (42.3 kg) (Excluding optional equipment)
Printer	
Network Printer Interface	Ethernet 10Base-T/100Base-TX
Communication Protocol	TCP/IP, LPD (LPR), IPP*, SNMP, DHCP
Local Printer Interface	USB
Printer Language (Standard)	Panasonic Printing System for Windows®
(Option)	PCL 5e Emulation, PCL 6 Emulation
Printing Speed*2 (from 1st paper tray)	16 ppm
Paper Size	Paper Tray: Ledger-Invoice Bypass: Ledger-Envelope (#10)
Printing Resolution	1,200 dpi equivalent x 600 dpi (PCL) 600 dpi x 600 dpi, 300 dpi x 300 dpi (GDI, PCL)
Printer Memory	20 MB
PCL/PS Spool Memory	6 GB with optional 40 GB HDD
Compatible Client Operating Systems	Windows® XP/2000/Server 2003, 98, Me, Windows NT® 4.0
Compatible Network Operating Systems	Windows NT 4.0/2000/Server 2003, Unix (LPR)*3, Linux (LPR)*3

Digital Copier	
Resolution	600 x 600 dpi
Gray Scale	256 steps
First Copy Time	Approx. 6.9 sec.
Multi Copy Speed*2	16 cpm
Maximum Original Size	Ledger
Copy Size	Ledger-Invoice
Copy Ratio	Enlargement (fixed) 200 %, 155 %, 129 %, 121 % Reduction (fixed) 79 %, 77 %, 65 %, 61 %, 50 %
Zoom (variable)	50-200% (in 1% increments)
Multiple Copy	1 to 999, Automatic reset to 1
Exposure Control	Text, Text/Photo, Photo
Sort Memory (Standard)	16 MB
(Option)	Base Memory plus 16 MB / 64 MB / 128 MB 12 GB (with optional 40 GB HDD)

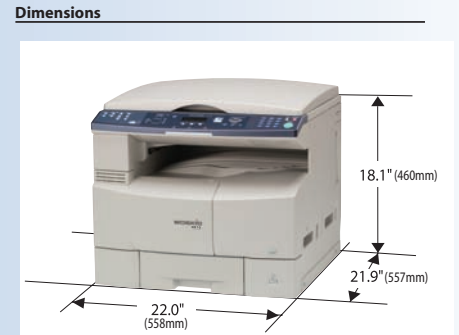

Notes	
*1	Dimensions and weight are approximate.
*2	Speeds are contingent upon applications, machine configuration, and status. Individual speeds may vary.
*3	Optional Printer Controller Module is required.
Design and specifications are subject to change without notice. Not all options may be available at the time of notification.	
Microsoft® Windows® Windows NT® and Windows Server® are registered trademarks of Microsoft Corporation. Adobe, PostScript and PostScript 3 are either registered trademarks or trademarks of Adobe Systems Incorporated in the United States and/or other countries. PCL is either trademark or registered trademark of Hewlett-Packard Company and/or its subsidiaries. WORKIO® is a registered trademark of Matsushita Electric Industrial Co., Ltd. All other brand or product name are the property of their respective holders.	
This Product is designed to reduce hazardous chemical substances along with the RoHS directive	

Panasonic®

Panasonic Digital Document Company
Unit of Panasonic Corporation of North America
One Panasonic Way, Secaucus, NJ 07094
For a local dealer, please call 1-800-742-8086
panasonic.com/office

ISO 9001
Quality Management System
Our business processes which produce document, information and network products, from manufacturing to marketing, conform to ISO9001 Quality Management Systems standard. Design, development, manufacture, installation, repair and maintenance of document, information and network products, their associated devices and consumables. In addition, the plants outside Japan have acquired ISO 9001 certification.



As an Energy Star® Partner, Panasonic has determined that this product meets the Energy Star® Guidelines for energy efficiency.